

Edinburgh Solar Stainless Steel Deck Lights (Set of 8)

Solar tips:



Ensure your solar panel is South facing or as near as possible



Clean your solar panel from time to time



Do **NOT** place your solar panel in shaded areas.



Do **NOT** charge behind glass

Your lights will not charge correctly if they are charged inside, behind glass or by using artificial light

Thank you for choosing The Solar Centre's Edinburgh Solar Stainless Steel Deck Lights. Please read these instructions carefully before using your lights.

Always take care when installing your Edinburgh Solar Stainless Steel Deck Lights, especially when making modifications to your property.

Solar Panel Installation

The Edinburgh has a powerful solar panel that charges the internal high capacity batteries during the day. At night the charge in the internal batteries powers the deck lights.

Before installing your solar panel you'll need to consider the best place for it to receive the most amount of sunlight. Position the solar panel in a South facing location that is not obstructed by buildings, fences, trees, sheds, bushes or the shadows that these create. Please note that a poor solar panel location will drastically reduce the performance of your Edinburgh Deck Lights.



The solar panel must be located within 2.8m of where you intend to position the first deck light and can be mounted with the spike into soft ground. If the ground is hard please soften the ground with water to avoid damaging the spike when pushing it into the ground. Please note that any damage caused to your lights as a result of driving them into hard ground is not covered by your warranty.


1. Push the spike into the cylinder shaped stem and push spike into ground
2. Attach the panel to the spike by removing the screw from the top stem taking care the nut remains in place.
3. Hold the panel, in place and tighten the screw.

Installing the deck lights

Each Deck Light requires a 2.5cm (1") hole. The light must be inserted so the stainless steel top sits almost flush.

Each Light has 2 cables exiting the underside of the black light body. One cable has to be connected to the previous light using the Quick Connect system, the other cable must reach to the next light. Each connector must be tightly connected by hand to ensure a good connection.

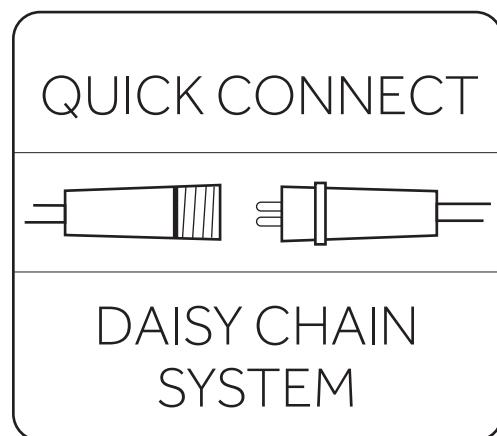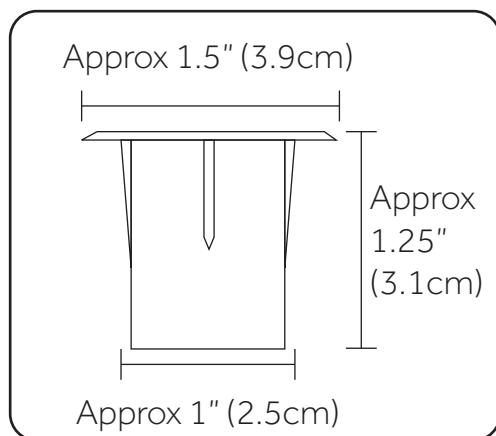

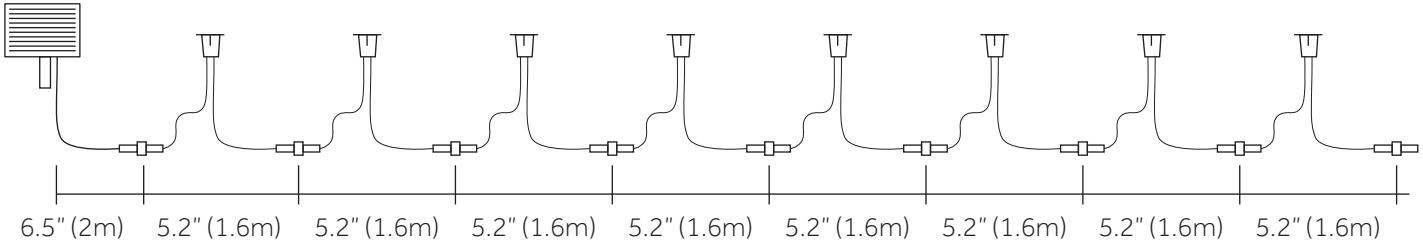

Operating Instructions

Edinburgh Deck Lights must be charged for 3 days with the switch on the underside of the panel in the off position to give the batteries a charge to full. Once completed the switch can be moved to the On position - the lights will turn on automatically after dusk.

Day to day the switch should be left in the on position, the lights will operate automatically every evening at dusk and turn off automatically in the morning. Move the switch to the off position to stop the automatic function.

Troubleshooting

If you are encountering problems with your lights, it's more than likely something you can resolve yourself. A poorly located solar panel will struggle to work at all, but that doesn't mean there is a fault with the unit. Please try the troubleshooting tips below before contacting your retailer.

1. Double check the location of your solar panel. Ensure it is as south facing as possible and in an unobstructed location.
2. Are all of the connectors between the lights and the solar panel connected? Is the switch in the on position?
3. Turn the switch to off and leave it to recharge for 5 days.
4. After 5 days return to the panel after dark and turn the switch to the on position. Cover the panel with a tea towel or similar to rule out any other sources of light hitting the panel, tricking it into thinking it's daylight and therefore stopping the lights from coming on.
5. If your light still does not illuminate please contact your retailer.

Maintenance

Clean the surface of the solar panel with a soft, slightly moistened cloth or a dry brush only. Do not use corrosive cleansing agents or chemical solutions since this may damage the housing surface or impair operation. Keep the solar panel free of dirt, debris and snow, or the batteries will not charge properly. This may also shorten battery life or cause malfunction.

Safety Instructions

The Solar Centre assume no liability for any damage resulting from the use of this product, nor do we assume liability for any damage to property or personal injury caused by improper use or failure to observe the safety instructions.

Unauthorised conversion and/or modification of the unit will invalidate any guarantee. To avoid damage to eyesight, do not look directly at the light source. This device is not a toy and should be kept out of reach of children. Do not expose the device to extreme temperatures (less than -25°C or higher than 50°C) or strong vibration or mechanical stress.

For customer support please contact:

The Solar Centre Ltd
Unit 5, Dencora Centre
Campfield Road
St Albans
AL1 5HN

T: 0845 094 1250
W: solarcentre.co.uk
E: info@solarcentre.co.uk

